

# WALK OFF® MATS



## WOM® – Solution Dyed Mats and Rolls

Research has shown that most of the dust and dirt in a building is brought in by pedestrian traffic. The new WOM® product range by Milliken Walk Off® Mats provides an effective barrier against that type of floor contamination, stopping it literally at the door and minimising the hazard of slippery floors.

The range consists of 3 different textile constructions offering a large choice of textures and colours combined with our latest generation of nitrile rubber backing providing superior performance during the whole lifetime of the product.

The WOM® Plus range is also available in 25 metre long rolls on pvc backing.

# WOM<sup>®</sup> – Solution Dyed Mats & Rolls

WOM<sup>®</sup> is a professional mat product range constructed with high quality Everwear<sup>®</sup> solution dyed fibres combined with a long-lasting washable rubber backing. Its unique pile construction offers a superior performance in terms of function and long-term appearance retention.

## Function

WOM<sup>®</sup> mats are specially designed to pick up dirt and moisture in heavy traffic areas and buildings where a high level of cleanliness is critical. Because they can withstand washing at high temperatures, WOM<sup>®</sup> mats can also be used in industrial applications where heavy soiling can occur. (For details about washing procedure, please consult our Processing & Handling Guidelines)

## Appearance Retention

The pre-shunk Everwear<sup>®</sup> yarn has been specially developed to ensure that the mat retains its functionality and appearance after many wash cycles – thus minimizing the difference between new and old mats in service.

WOM<sup>®</sup> mats have a high level of UV resistance and are extremely colourfast. They will not pick up colour from other solution dyed mats during the wash process, if washed according to the recommendations in our Processing & Handling Guidelines.

## Backing


The WOM<sup>®</sup> textile mats are manufactured with our latest generation of nitrile rubber backing offering 3 major benefits compared to traditional rubber backing:

1. **strengthened rubber borders for increased resistance to tearing and better durability**
2. **heavyweight primary backing for a better floor stability and resistance to rippling**
3. **lighter weight construction for improved ergonomics during handling in the laundry and in service – whilst respecting the environment.**




WOM<sup>®</sup> Plus rolls are manufactured on pvc backing


## WOM<sup>®</sup> Textures

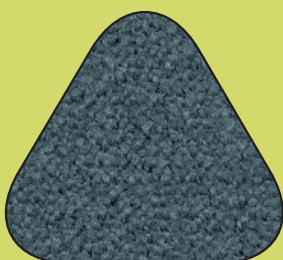

Unicolour

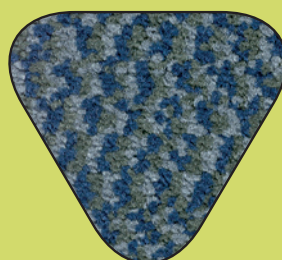

Plus

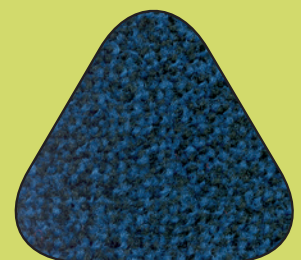

Original

## WOM® Original

Textile mats tufted from a high twist bi-colour nylon yarn.




## WOM® Plus

Textile mats tufted using three colours of high twist nylon yarn.



## WOM® Unicolour

Choose from our most popular solution dyed nylon colours.

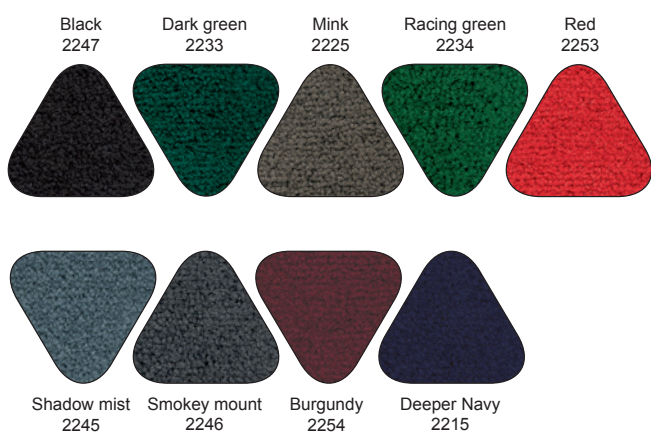

# Technical Specifications Mats

Product construction	Solution dyed high twist nylon tufted pile with 100% nitrile rubber backing
Sizes in cm (ca.)	85x60, 85x120, 85x150, 85x300, 115x180, 115x200, 115x240, 150x250
Fabric weight (ca.)	760 gms/m <sup>2</sup>
Total weight (ca.)	2260 gms/m <sup>2</sup>
Pile height	10 mm
Border thickness	2.1 mm
Electrical behaviour	Antistatic
Energy <sup>®</sup> backing	Allows optimum elimination of water during extraction process (reduces/eliminates drying time)
UV resistance	ISO 105-B02 test, rated 8 on blue scale (maximum mark)
Fire classification	ISO 13501 test, rated E <sub>fl</sub>
Laundering	Please consult our Processing & Handling Guidelines
Warranty	Please refer to our written guarantee

Mats are available with Gripper<sup>®</sup> or flat back and customer labelling is available on borders and on the back of the mat.

# Technical Specifications Rolls

Product construction	Solution dyed high twist nylon tufted pile with 100% PVC backing
Colours	2302 Granite, 2309 Moonstone, 2311 Onyx, 2305 Pebble
Sizes in cm (ca.)	200 x 2500
Fabric weight (ca.)	760 gms/m <sup>2</sup>
Total weight (ca.)	3260 gms/m <sup>2</sup>
Total product thickness	8 mm
Electrical behaviour	Antistatic
Border width	20 mm
UV resistance	ISO 105-B02 test, rated 8 on blue scale (maximum mark)
Fire classification	ISO 13501 test, rated D <sub>fl</sub> -s1
Warranty	Please refer to our written guarantee

All specifications are subject to change to meet the ongoing improvements and innovation of our products.

All specifications are according to ISO 9001 Quality certification and ISO 14001 Environmental certification.

## Milliken Walk Off<sup>®</sup> Mats

Fabriksvej 5  
DK-8544 Mørke  
Denmark  
T +45 87 85 85 85  
F +45 87 85 86 00  
www.millikenwom.com

United Kingdom free phone 0800 964 569  
Germany free phone 0800 1813 688  
France free phone 0800 901 311

Customer Service fax +45 87 85 85 10  
info@milliken.dk

